



TOOL FEATURES

- Full sequential trigger to ensure maximum safety
- Optional switchable trigger for faster applications
- Multi-directional exhaust

MEDIUM WIRE STAPLES

- For medium crown staples
- Up to 40 mm (1 9/16") leg length
- With different point options available
- Are available in different materials



CONTACT & SERVICE

Our sales team
is available at:

P +1 800 239 8665
sales@beck-america.com
www.beck-america.com

DESCRIPTION

- Rubber comfort grip ensures a non-slip handling and reduces vibrations and fatigue
- No-mar tip avoids marking of soft wood
- Quick release nose for easy unjamming
- Depth control for precise countersinking

BECK AMERICA

105 Industrial Park Drive
35661 Muscle Shoals, Alabama | USA
P +1 800 239 8665 | F +1 256 381 6659
sales@beck-america.com | www.beck-america.com

Follow us



F20A SG-40 FS

APPLICATIONS

- Outdoor furniture
- Drawer guides
- Rear panels
- Frame assembly
- Panels & profiled boards
- Baseboards
- Boat interiors
- Manufactured houses
- Windows
- Fruit Cases
- Trade Shows

HANDLING

1. Load staples from the top into the magazine
2. Connect air supply
3. Avoid a dry or dirty tool by lubricating respectively cleaning regularly

TOOL CHARACTERISTICS

Height	Width
253 mm	60 mm
9.96 inch	2.36 inch
Length	Weight
266 mm	1,29 kg
10.47 inch	2.84 lbs

Pressure

5 - 8 bar | 70 - 120 psi

Air consumption per shot

0.53 L. | 0.019 SCF

Performance at 90 psi | 6.2 bar
(0.62 MPa)

FASTENER DATA

Outside Crown	10.10 mm 0.397"
Inside Crown	7.80 mm 0.307"
Diameter	1.00 x 1.25 mm 0.039 x 0.049"
Length	10 - 40 mm 3/8 - 1 9/16"
Magazine Capacity	135
Staple Type	FASCO® SG, PREBENA® G, SENCO® M, KIHLEBERG® 782

NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$: 92.50 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 79.50 dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE


(UNI ISO/TS 8662-11)

is below the declaration limit
set by UNI EN ISO 12100-1/2

ACTUATION & LOADING

Actuation System: Full sequential
with an additional switchable trigger
(single shot/contact trigger)

Loading: Top Loading

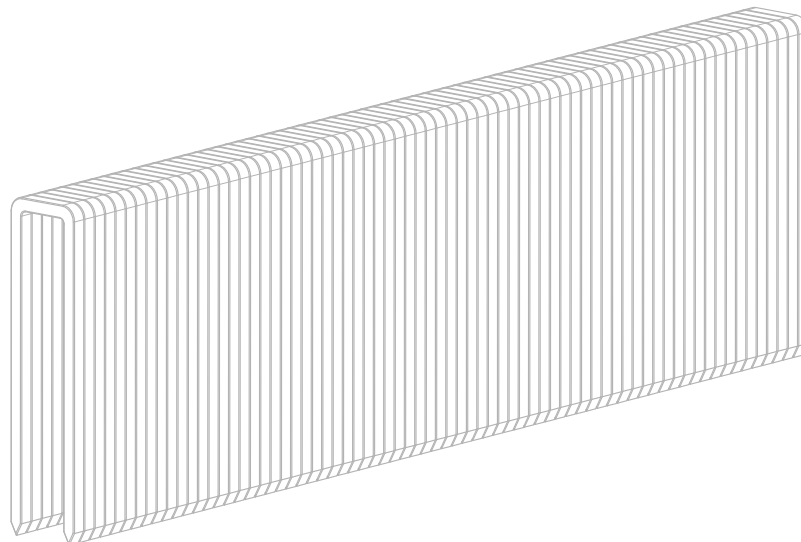

Changes and errors excepted. All rights reserved.

FASCO® is a registered trademark of the RAIMUND BECK KG.

PREBENA®, SENCO® and KIHLEBERG® are all trademarks of their respective owner.

VERSION
05/2021 US