



**F58A RHN20-90C  
SCR LOW PROFILE**



**TOOL-  
FEATURES**

- Reduced weight thanks to low tool profile
- Includes a patented sequential fire/ bump fire device
- New, easy jam clearing system: total release of the complete magazine

**SCRAIL®  
SUBLOC® PRO**

- Aggressive double threads for squeakless subfloors
- Vastly improved holding power vs. ring shank nails
- Material: standard steel, SS304/A2 stainless steel
- Finish: electro-galvanized, FasCoat®




**CONTACT & SERVICE**

Our sales team  
is available at:

P +1 800 239 8665  
sales@beck-america.com  
www.beck-america.com

**SCRAIL®  
SUBLOC® PRO  
WITHDRAWAL VALUES:**

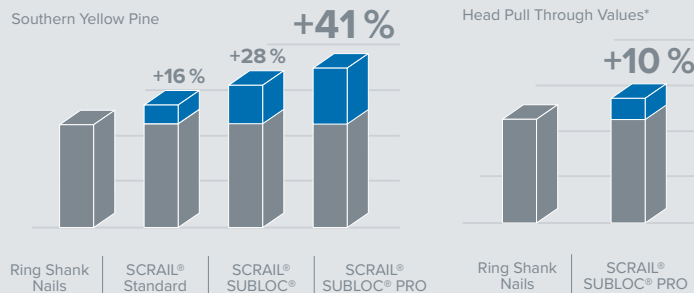

\*Detailed Plywood, OSB and 1AdvanTech performance data available on request.

1AdvanTech® is a trademark of its respective owner.



**BECK AMERICA**  
105 Industrial Park Drive  
35661 Muscle Shoals, Alabama | USA  
P +1 800 239 8665 | F +1 256 381 6659  
E sales@beck-america.com | W www.beck-america.com

# F58A RHN20-90C SCR LOW PROFILE

## APPLICATIONS

- Subflooring - SUBLOC® PRO
- Rafters and joists
- Decking
- Trusses
- Framing
- Fencing
- Pallets
- Boxes and crates

## HANDLING

1. Load fastener from the top into the magazine
2. Connect air supply
3. Avoid a dry or dirty tool by lubricating respectively cleaning regularly

## TOOL CHARACTERISTICS

Height	Width
350 mm	137 mm
13.78 inch	5.39 inch
Length	Weight
540 mm	3,75 kg
21.20 inch	8.26 lbs

### Pressure

5 - 8 bar | 70 - 120 psi

### Air consumption per shot

1.86 L. | 0.066 SCF

Performance at 90 psi | 6.2 bar (0.62 MPa)

## NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$  : 98.38 dB (A) -  $K_{WA,1s}$  , 2.5

$L_{pA,1s}$  : 93.00 dB (A) -  $K_{pA,1s}$  , 2.5

## VIBRATION VALUE

(UNI ISO/TS 8662-11)

3.98 m/s<sup>2</sup>


## ACTUATION & LOADING

Actuation System: Single Shot & Contact Actuation

Loading: Top Loading

## VARIATIONS

F58AC RHN20-90C SCR  
F58AC CHN33-90B SCR  
F58A CHN33-90B SCR

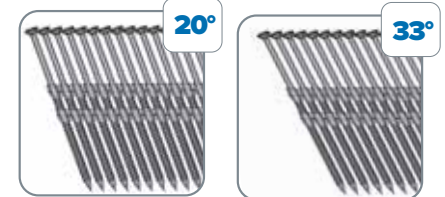

## FASTENER DATA NAILS

<b>Diameter</b>	2,9 - 3,8 mm   0.114 - 0.148"
<b>Length</b>	50 - 90 mm   2 - 3 1/2"
<b>Capacity</b>	62
<b>Nail Type</b>	17° + 20° Plastic Strip Nails

## FASTENER DATA SCRAIL®

<b>Diameter</b>	2,8 - 3,5 mm   0.110 - 0.138"
<b>Length</b>	50 - 75 mm   2-3"
<b>Capacity</b>	62
<b>SCRAIL® Type</b>	20° Plastic Strip SCRAIL®
<b>Drive Type</b>	phillips®   pozi (pozi-drive®)   torx®   square   versa

