



F20A 92-32 FS

TOOL FEATURES

- Full sequential trigger to ensure maximum safety
- Optional switchable trigger for faster applications
- Multi-directional exhaust

MEDIUM WIRE STAPLES

- For medium crown staples
- Up to 32 mm (1 1/4") leg length
- With different point options available
- Are available in different materials



CONTACT & SERVICE

Our sales team is available at:

P +1 800 239 8665
sales@beck-america.com
www.beck-america.com

DESCRIPTION

- Rubber comfort grip ensures a non-slip handling and reduces vibrations and fatigue
- No-mar tip avoids marking of soft wood
- Quick release nose for easy unjamming
- Depth control for precise countersinking

F20A 92-32 FS

APPLICATIONS

- Outdoor furniture
- Drawer guides
- Rear panels
- Frame assembly
- Panels & profiled boards
- Baseboards
- Boat interiors
- Manufactured houses
- Windows
- Fruit Cases
- Trade Shows

HANDLING

1. Load staples from the top into the magazine
2. Connect air supply
3. Avoid a dry or dirty tool by lubricating respectively cleaning regularly

TOOL CHARACTERISTICS

| Height | Width |
|------------|-----------|
| 220 mm | 60 mm |
| 8.66 inch | 2.36 inch |
| Length | Weight |
| 266 mm | 1,24 kg |
| 10.47 inch | 2.73 lbs |

Pressure

5 - 8 bar | 70 - 120 psi

Air consumption per shot

0.53 L. | 0.019 SCF
Performance at 90 psi | 6.2 bar
(0.62 MPa)

FASTENER DATA

| | |
|-------------------|--|
| Outside Crown | 8.90 mm 0.350" |
| Inside Crown | 6.40 mm 0.252" |
| Diameter | 1.00 x 1.25 mm 0.039 x 0.049" |
| Length | 10 - 32 mm 3/8 - 1 1/4" |
| Magazine Capacity | 135 170 (LM) |
| Staple Type | BEA® 92, ATRO® 92, BOSTITCH® SL5035, KIHLEBERG® 664 |

NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$: 94.20 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 81.20 dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE


(UNI ISO/TS 8662-11)

is below the declaration limit
set by UNI EN ISO 12100-1/2

ACTUATION & LOADING

Actuation System: Full sequential
with an additional switchable trigger
(single shot/contact trigger)

Loading: Top Loading

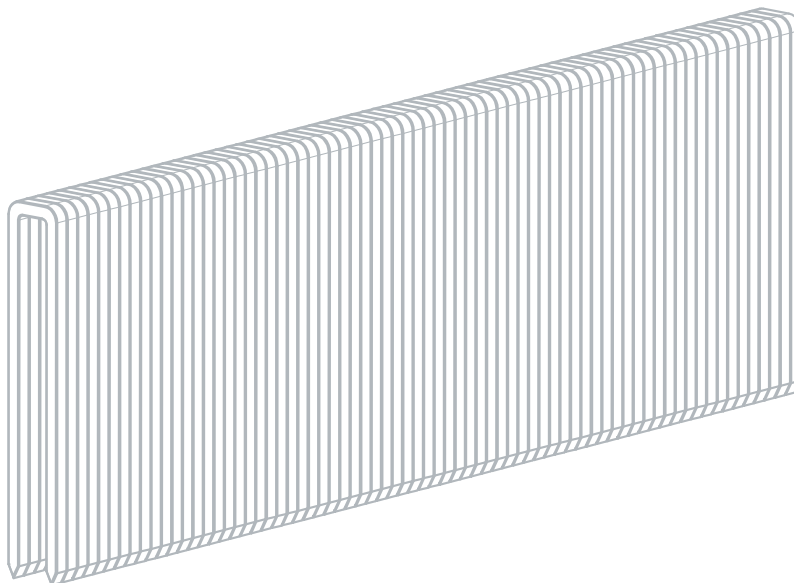

Changes and errors excepted. All rights reserved.

FASCO® is a registered trademark of the RAIMUND BECK KG.

BEA®, ATRO®, BOSTITCH® and KIHLEBERG® are all trademarks of their respective owner.

VERSION
04/2021 US